





简述 Description



- 铝压铸灯体外壳，铝合金拉伸灯杆，高度根据客户需要截取
- 模组式光源模块配超白钢化玻璃，灯具模组角度可调
- 防紫外线聚氨酯塑粉喷涂表面，耐腐蚀可以达到1000小时以上
- 灯具表面最高温度不超过50度，安全可靠
- 所有外部螺钉均为304不锈钢材质，底座埋件额外可选配

- Aluminum die casting cover, extruded aluminum body, it can be cut different height.
- LED module design and with supper tempered galss, and the module angle can adjustable.
- Surface anti-ultraviolet pure polyester powder painting, Corrosion resistance can be more than 1000 hours.
- The maximum surface temperature of all accessible part under 50 degrees for safety and reliable.
- All external screw are in 304 stainless steel, Additional optional base embedded parts.

配光曲线 Photometric Data

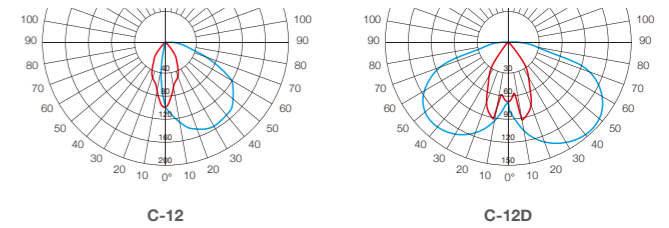

技术参数 Technology data

Code	Input voltage	Power	LED Qty	Weight	Packing Size
LED chips - 3030					
C-12LED12-18H80	100V-240V	12W	18	2.3	845*215*170
C-12LED12-18H100	100V-240V	12W	18	2.3	1045*215*170
LED chips - 3030					
C-12DLED18-36H80	100V-240V	18W	36	2.8	845*325*360
C-12DLED18-36H100	100V-240V	18W	36	2.8	1045*325*360

可选配件 Accessories

	Code
防水接线盒 Terminal Box	230000232
基础螺杆 Anchor Bolts	250000377
膨胀螺钉 Expansion Bolts	613040003

延伸产品 More in family

