





简述 Description



- 铝压铸盖帽，铝合金拉伸灯体，可根据需要截取不同高度
 - 高透明PC扩散罩，能有效防止发黄老化
 - 灯具采用间接投射发光模式，具有很好的视觉舒适性
 - 高性能LED芯片，驱动有0-10V / DALI / 编程电源选择
 - 防紫外线聚氨酯塑粉喷涂表面，耐腐蚀可以达到1000小时以上
 - 灯具表面最高温度不超过50度，安全可靠
- Aluminum die casting cover, extruded aluminum body, it can be cut different height.
 - High transparent PC diffuser, it can effectively prevent yellowing and aging.
 - Indirect light luminaire for use with led, which has high visual comfort.
 - High quality LED chips, Driver with 0-10V/DALI/programmed options.
 - Surface anti-ultraviolet pure polyester powder painting, Corrosion resistance can be more than 1000 hours.
 - The maximum surface temperature of all accessible part under 50 degrees for safety and reliable.

配光曲线 Photometric Data

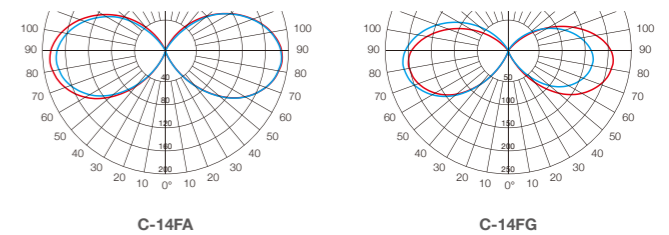


技术参数 Technology data

Code	Input voltage	Power	LED Qty	Weight	Packing Size
LED chips - 3030					
C-14FALED25-144H80	100V-240V	25W	144	5.8	185*185*820
C-14FALED25-144H100	100V-240V	25W	144	6.5	185*185*1020
LED chips - 3030					
C-14FGLED25-144H80	100V-240V	25W	144	5.8	185*185*820
C-14FGLED25-144H100	100V-240V	25W	144	6.5	185*185*1020

可选配件 Accessories

	Code
防水连接器 IP68 Connector	320000047
基础螺杆 Anchor Bolts	250000378
基础锚 Anchor	250000379

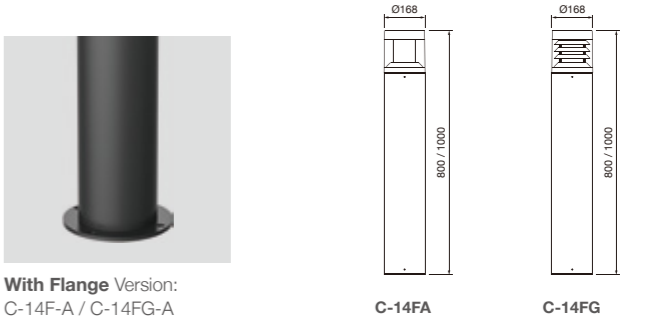

With Flange Version: C-14F-A / C-14FG-A