




The photograph may not match the reference exactly. Please read the product description to identify the finish.

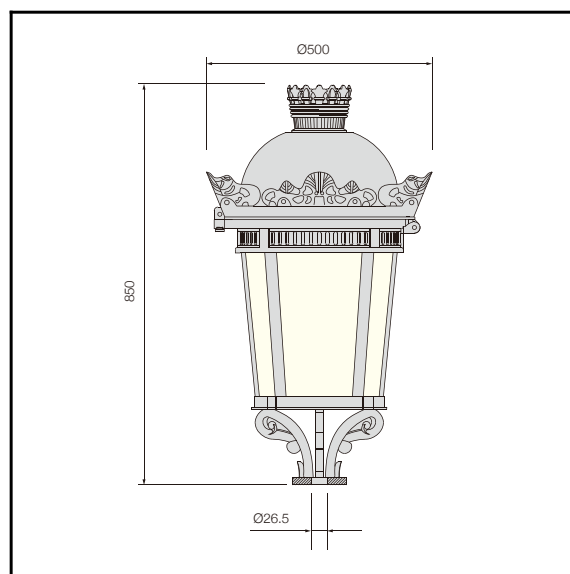

**T-85MNLED**

**TECHNICAL CHARACTERISTIC**



Product Model:	T-85MNLED30-12	T-85MNLED60-24	T-85MNLED40-16	T-85MNLED80-32	T-85MNLED40-56B	T-85MNLED60-84B
IP Protection degrees:	IP66	IP66	IP66	IP66	IP66	IP66
IK Protection degrees:	IK08	IK08	IK08	IK08	IK08	IK08
Light source:	12 x LED CREE / 12 x LUXEON 5050	24 x LED CREE / 24 x LUXEON 5050	16 x LED CREE / 16 x LUXEON 5050	32 x LED CREE / 32 x LUXEON 5050	56 x LUXEON 3030	84 x LUXEON 3030
Total power consumption:	30W	60W	40W	80W	40W	60W
Luminous Flux:	3750-4000Lm	7500-8100Lm	5000-5400Lm	10000-10800Lm	5000-5400Lm	7500-8100Lm
Luminous efficiency:	125-135Lm/w					
Color temperature:	4000K as standard. Optimal 2700K, 3000K & 5700K. Amber LED available					
Voltage/Frequency:	100-240V/50-60Hz					
Warranty(Years):	5					
Units per box:	1					
Net Weight(Kg)	10	10.2	10.2	10.5	10.2	10.2


**MATERIALS / FINISHES**

<b>Structure material:</b> High purity aluminium	<b>aiffuser material:</b> PC
<b>Structure finish:</b> Black	<b>Diffuser finish:</b> Transparent

**GEAR**

Multi-voltage electronic gear included (110-240 V / 50-60 Hz)

Lm<sup>(N)</sup>: Nominal flow of light in actual working conditions. Its actual flow will depend on the environmental conditions and the efficiency of the optics and/or diffuser.

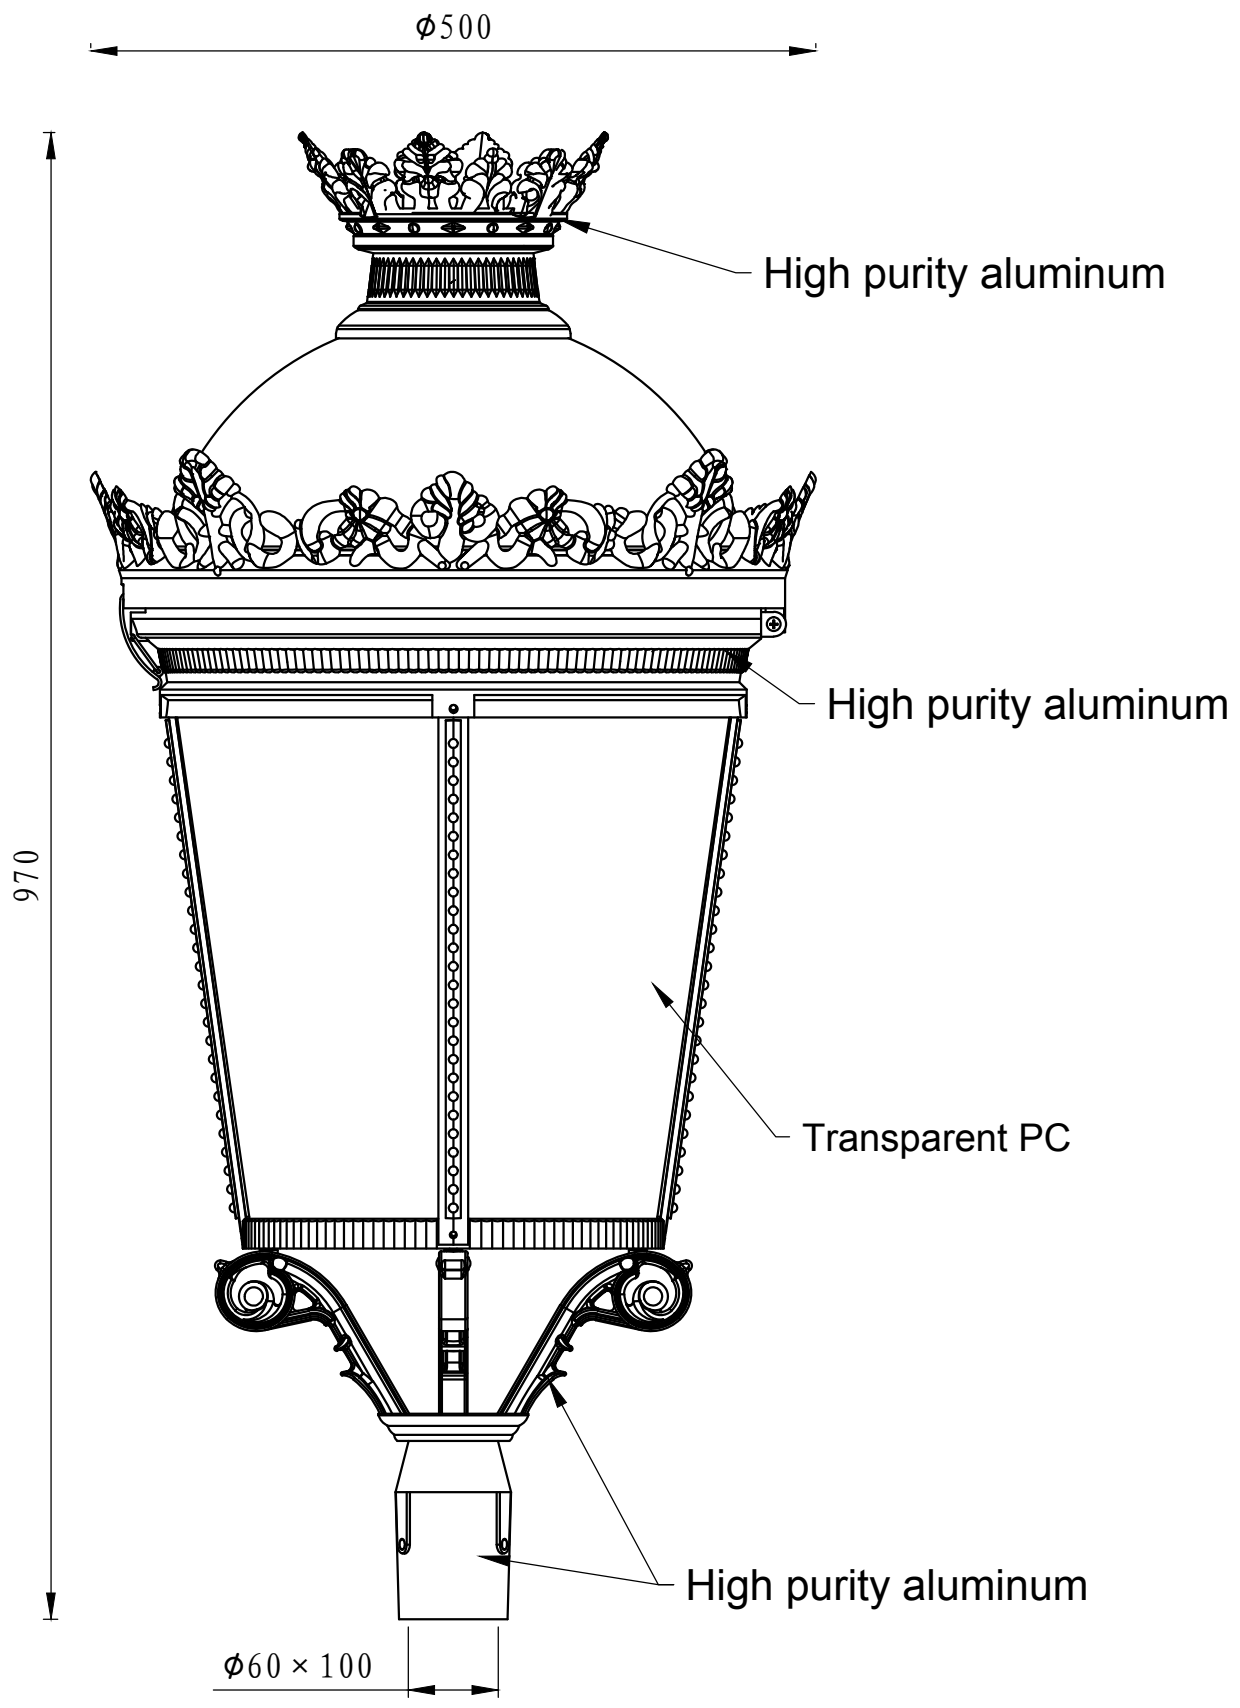

Installation template