





The photograph may not match the reference exactly. Please read the product description to identify the finish.

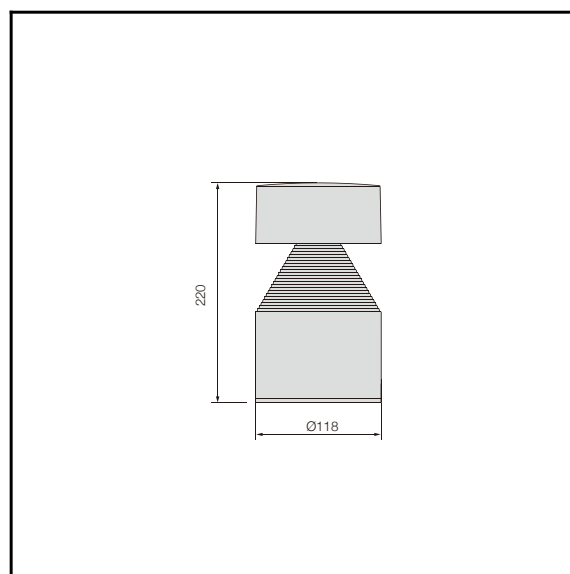

**B-13**

### TECHNICAL CHARACTERISTICS

Type:	Wall lighting
IP Protection degrees:	IP65
IK Protection degrees:	IK08
Light source 1:	42xLED SMD 9W White - 3000K/4200K 600 lm <sup>(N)</sup> CRI 75
Total power consumption (W):	9.2
Voltage / Frequency:	100-240V/50-60Hz
Warranty (Years):	3
Units per box:	4
Net Weight (Kg):	1.7





### MATERIALS / FINISHES

<b>Structure material:</b> High purity aluminium	<b>aiffuser material:</b> PC
<b>Structure finish:</b> Black	<b>Diffuser finish:</b> Matt

### GEAR

Multi-voltage electronic gear included (110-240 V / 50-60 Hz)



Lm<sup>(N)</sup>: Nominal flow of light in actual working conditions. Its actual flow will depend on the environmental conditions and the efficiency of the optics and/or diffuser.

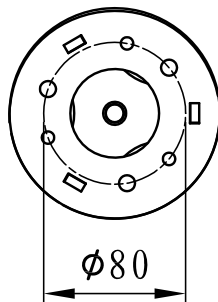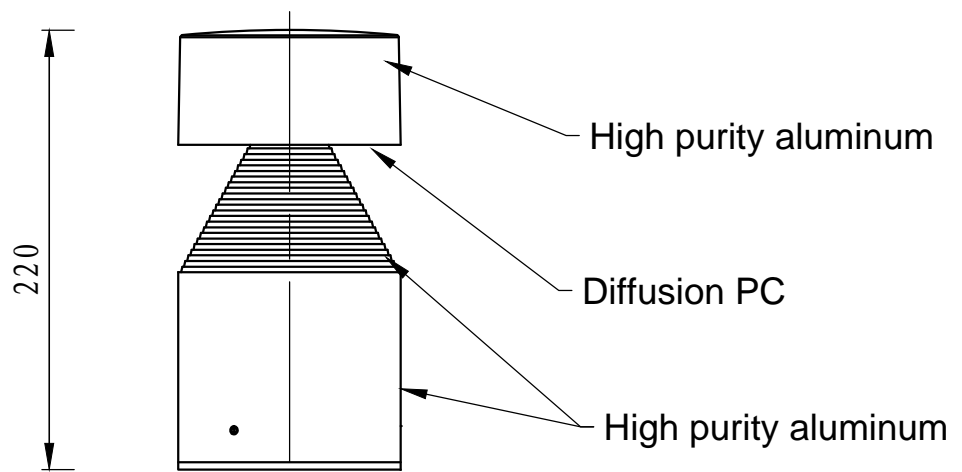


Installation template

# OUTDOOR


①

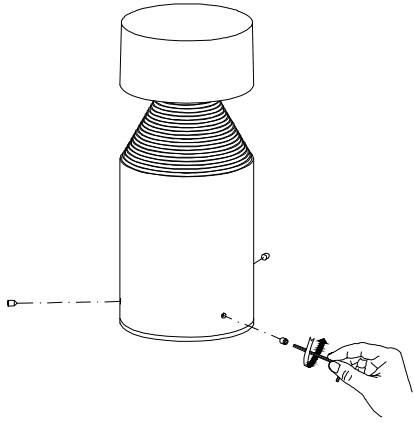


②

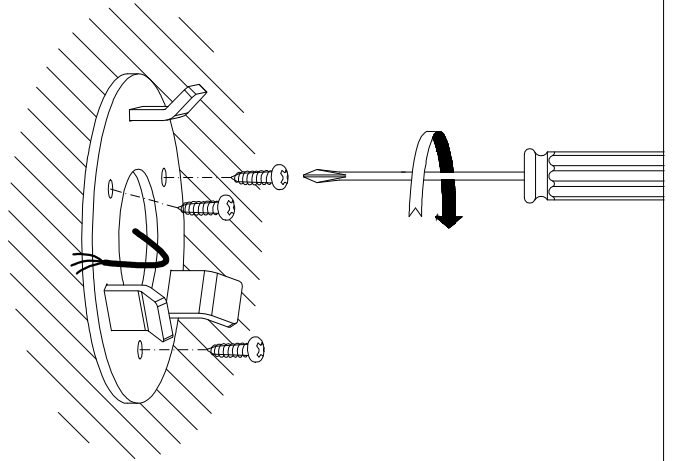


③

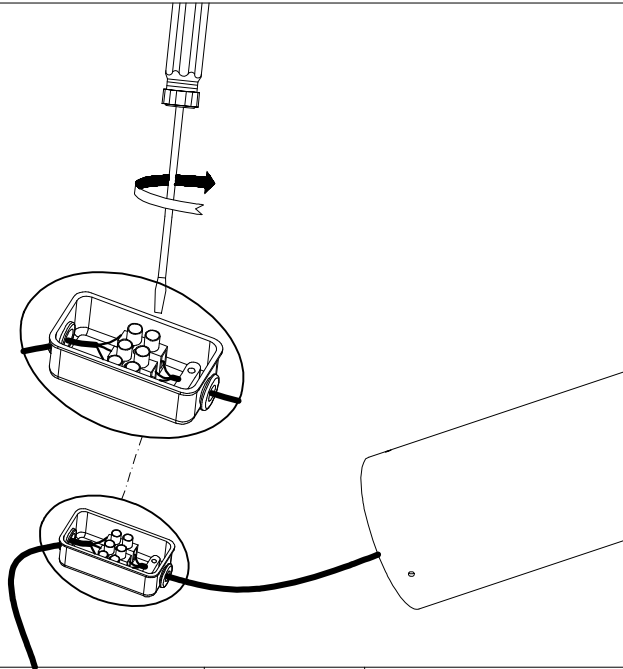

④

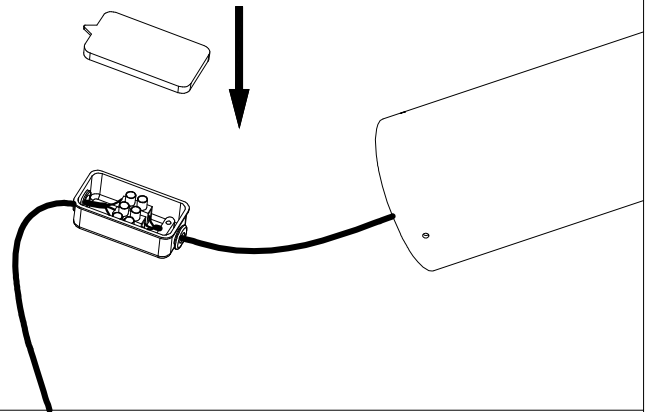

⑤

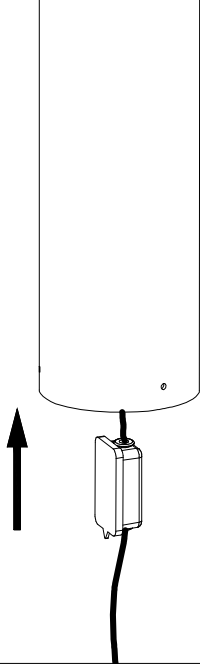

⑥

