

The photograph may not match the reference exactly. Please read the product description to identify the finish.

TECHNICAL CHARACTERISTICS



Product Model:	M-07LED60-28	M-07LED60-28RGBW
IP Protection degrees:	IP68	
IK Protection degrees:	IK10	
Light source:	28 x LED SAMSUNG 3535	28 x RGBW
Total power consumption:	60W	60W
Luminous Flux:	4200-6000Lm	/
Luminous efficiency:	70-100Lm/w	/
Color temperature:	4000K as standard. Optimal 2700K, 3000K & 5700K. Amber LED available	RGBW
Voltage/Frequency:	100-240V/50-60Hz / DC24V	
Warranty(Years):	3	3
Units per box:	1	1
Net Weight(Kg)	4.5	4.5

MATERIALS / FINISHES

Structure material: High purity aluminium	Aiffuser material: Steel 304
Structure finish: Silver	Diffuser finish: Transparent


GEAR

Multi-voltage electronic gear included (100-240 V / 50-60 Hz)

Lm^(N): Nominal flow of light in actual working conditions. Its actual flow will depend on the environmental conditions and the efficiency of the optics and/or diffuser.


Kled reserves the right to make the necessary technical changes they deem adequate, in order to improve the features of the product. Please consult the sales team to clarify any doubt.

Tel.: +86 574 62566 890
Email: info@kled.com.cn
http://www.kled.com.cn/

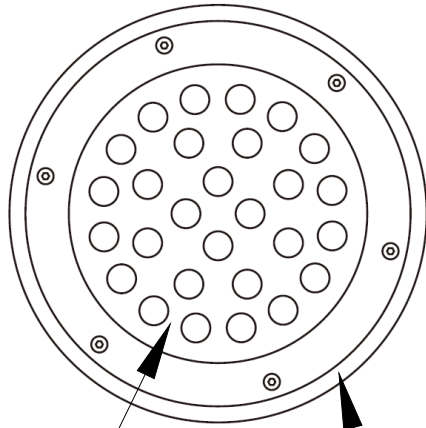

Transparent glass

Stainless Steel 304

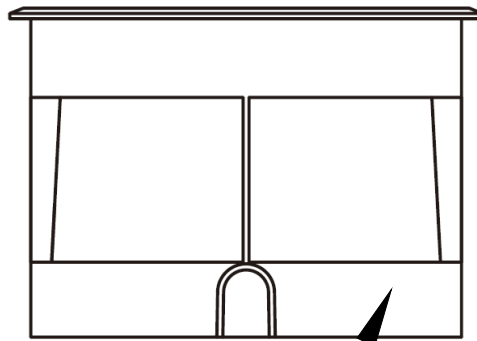

Plastic material

Installation template