

The photograph may not match the reference exactly.
Please read the product description to identify the finish.

TECHNICAL CHARACTERISTICS



Product Model:	M-09LED17-6L30	M-09LED32-12L50	M-09LED66-24L100	M-09LED24-6RGBW	M-09LED36-12RGBW	M-09LED72-24RGBW
IP Protection degrees:	IP68					
IK Protection degrees:	IK10					
Light source:	6x LED OSRAM 3030	12x LED OSRAM 3030	24 x LED OSRAM 3030	6 x RGBW	12 x RGBW	24 x RGBW
Total power consumption:	17W	32W	66W	24W	48W	82W
Luminous Flux:	850-1190Lm	1600-2240Lm	3300-4620Lm	/	/	/
Luminous efficiency:	50-70Lm/w	50-70Lm/w	50-70Lm/w	/	/	/
Color temperature:	4000K RA80 as standard. Optinal 2700K,3000K & 5700K. Amber LED available			RGBW		
Voltage/Frequency:	100-240V/50-60Hz / DC24V					
Warranty(Years):	3					
Units per box:	2					
Net Weight(Kg)	2.3	3.3	6.3	2.3	3.3	6.3


MATERIALS / FINISHES

Structure material: High purity aluminium	Aiffuser material: Steel 304
Structure finish: Silver	Diffuser finish: Transparent


Lm^(N): Nominal flow of light in actual working conditions. Its actual flow will depend on the environmental conditions and the efficiency of the optics and/or diffuser.

Kled reserves the right to make the necessary technical changes they deem adequate, in order to improve the features of the product.
Please consult the sales team to clarify any doubt.

Tel.: +86 574 62566 890
Email: info@kled.com.cn
http://www.kled.com.cn/



High purity aluminium

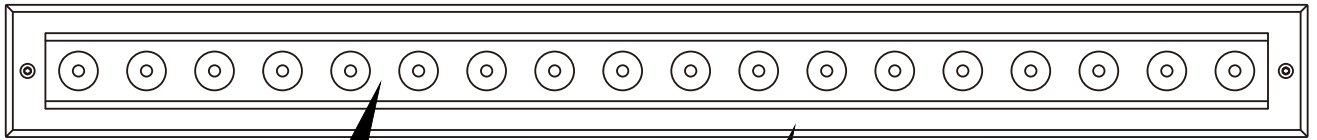

Transparent glass

Steel 304

Installation template