


The photograph may not match the reference exactly. Please read the product description to identify the finish.



TECHNICAL CHARACTERISTICS

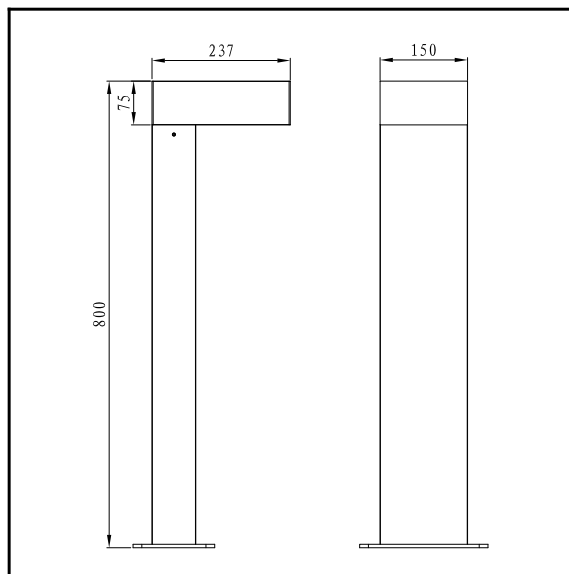

Product Model:	C-232SLED12-14
IP Protection degrees:	IP66
IK Protection degrees:	IK09
Light source:	14 x LUXEON 3030
Total power consumption:	12W
Luminous Flux:	1200-1320Lm
Luminous efficiency:	100-110Lm/w
Color temperature:	4000K as standard. Optinal 2700K,3000K & 5700K. Amber LED available
Voltage/Frequency:	220-240V/50-60Hz
Warranty(Years):	3
Units per box:	1
Net Weight(Kg)	Body : 5



MATERIALS / FINISHES

Structure material: High purity aluminium	aiffuser material: Glass
Structure finish: Silver	Diffuser finish: Transparent

GEAR

Multi-voltage electronic gear included (110-240 V / 50-60 Hz)

Lm^(N): Nominal flow of light in actual working conditions. Its actual flow will depend on the environmental conditions and the efficiency of the optics and/or diffuser.

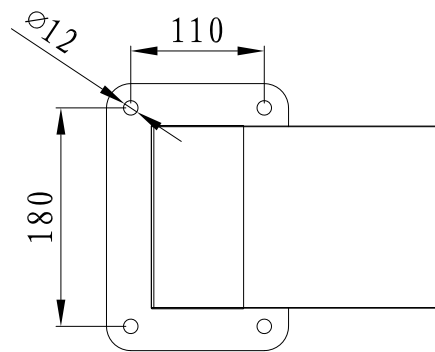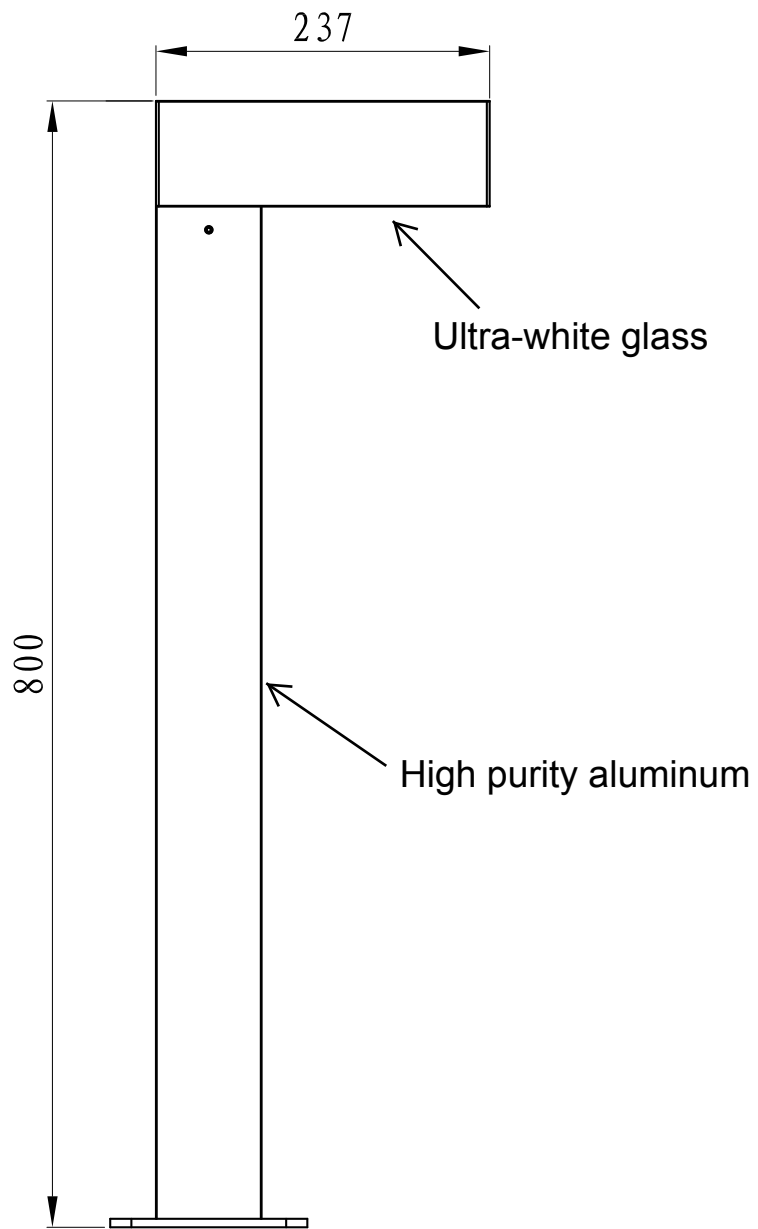

installation template

OUTDOOR

