





简述 Description



- 铝压铸盖帽，铝合金拉伸灯体，可根据需要截取不同高度
  - 顶部光源搭配PC扩散板，具有很高视觉舒适性
  - 高透光PC透镜，具有高视觉舒适性和均匀配光，供多种不同配光选择
  - 无生物蓝光危害风险，符合EN62471: 2008标准
  - 防紫外线聚氨酯塑料喷涂表面，耐腐蚀可以达1000小时以上
  - 灯具表面最高温度不超过50度，安全可靠
- Aluminum die casting cover, extruded aluminum body, it can be cut different height.
  - Top light source with PC diffuser for high visual comfort.
  - Optics with PC lens with high visual comfortable and uniform lighting distribution, multiple light distribution options.
  - Indirect light luminaire for use with led, which has high visual comfortable.
  - No photo-biological risk, (no risk linked to infrared, blue light and UV radiation) in accordance with EN62471:2008.
  - Surface anti-ultraviolet pure polyester powder painting.
  - The maximum surface temperature of all accessible part under 50 degrees.

配光曲线 Photometric Data

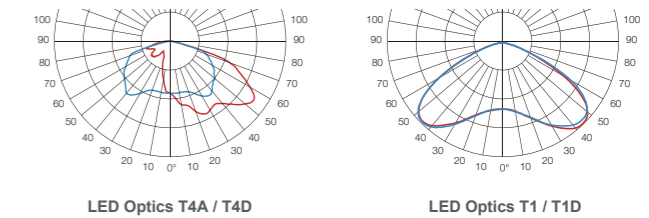

C-243  
20-25W

技术参数 Technology data


Code	Power	LED Qty	Input Voltage	Packing Size	Weight
LED chips - 5050					
C-243LED20-16H100	20W	16	100V-240V	1030*295*295	12
C-243LED25-24H100	25W	24	100V-240V	1030*295*295	12
C-243LED25-24H120	20W	16	100V-240V	1230*295*295	13.5
C-243LED25-24H120	25W	24	100V-240V	1230*295*295	13.5

可选配件 Accessories options

	Code
Q-02H防水连接器 Terminal Box	320000698
基础预埋件 Anchor Bolts	250000801
膨胀螺钉 Expansion Bolts	613040003
基础锚 Anchor	250000381


延伸产品 More in family

Solar version



CS-243

Solar Bollard Lighting: 10W.



C-234