



TS-243

KLED

方形四方太阳能柱灯 Square Solar Square Cloumn Lighting



- 铝合金拉伸灯体，模组式光源模块配超白钢化玻璃，方便拆卸安装
- 高透光PC透镜，具有高视觉舒适性和均匀配光，供多种不同配光选择
- 采用模组式光学透镜，多种光学可选
- 高强度铝合金型材灯柱，防腐塑粉喷涂表面
- 无生物蓝光危害风险，符合EN62471: 2008标准
- 采用通常用于电动客车的LiFePO₄电池
- 防紫外线聚氨酯塑粉喷涂表面，耐腐蚀可以达1000小时以上
- 分体化包装，节约成本，运输方便
- 所有外部螺钉均为304不锈钢材质

- Aluminum alloy tensile lamp body, modular light source module with ultra-white tempered glass, easy disassembly and installation.
- Optics with PC lens with high visual comfortable and uniform lighting distribution,multiple light distribution options.
- Comfort using modular optical lens, multiple optical options.
- High strength aluminum alloy profile lamp post, anti-corrosion plastic powder coating surface.
- No photo-biological risk,(no risk linked to infrared,blue light and UV radiation) in accordance with EN 62471:2008.
- With LiFePO₄ battery which usually apply for electric bus.
- Surface anti-ultraviolet pure polyester powder painting, Corrosion resistance can be more than 1000 hours.
- Separate packaging, cost saving, convenient transportation.
- All external screws are made of 304 stainless steel.

远程控制系统和智能系统可选

Remote control system & Smart
intelligent system available upon request




节能控制系统
Energy saving with
remote control system



物联网智能系统
Network for smart
intelligent system




遥控器
Remote control

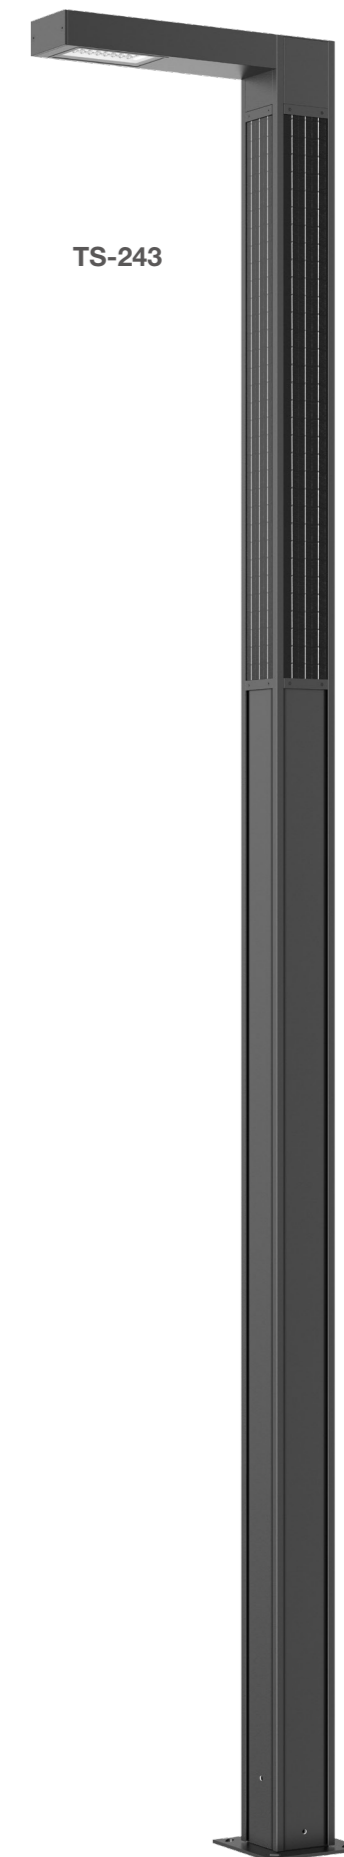

TS-243

应用透镜 Optics application

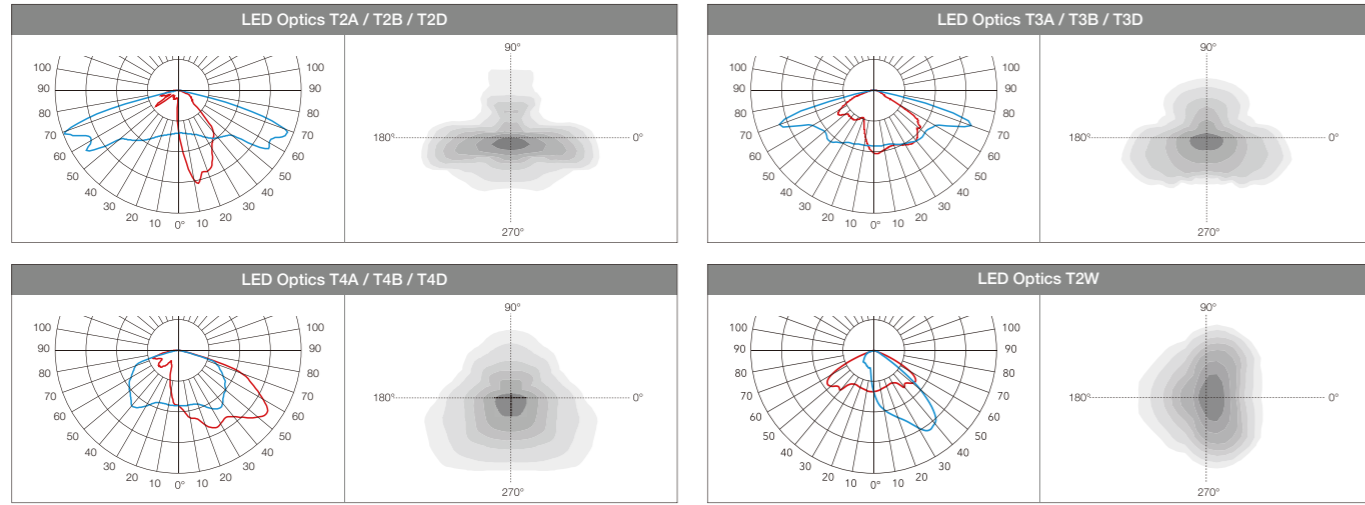

TS-243

Square Solar Square Column Lighting

Technical Data

SOLAR-GENERAL

Autonomy Information : 2 days
 Working mode : 4hrs - 100%, 2hrs - 50%, 5hrs - 30%

Model 灯具型号	Power 功率	Solar PV 太阳能板	LiFePO ₄ Battery 电池	Luminous 光通量	LED Chips LED灯珠
TS-243LED30-H400	30W	18V/160W	384WH/12.8V 30AH	4500 lm	5050*16pcs
TS-243LED40-H500	40W	18V/160W	538WH/12.8V 42AH	6000 lm	5050*16pcs

SOLAR-ADVANCE

Autonomy Information : 3 days
 Working mode : 2hrs - 100%, 2hrs - 50%, 7hrs - 20%

Model 灯具型号	Power 功率	Solar PV 太阳能板	LiFePO ₄ Battery 电池	Luminous 光通量	LED Chips LED灯珠
TS-243LED30-H400	30W	18V/160W	384WH/12.8V 30AH	4500 lm	5050*16pcs
TS-243LED40-H500	40W	18V/160W	538WH/12.8V 42AH	6000 lm	5050*16pcs



产品尺寸 Product dimensions

